



CC-084/CPA REPLACEMENT SHEET

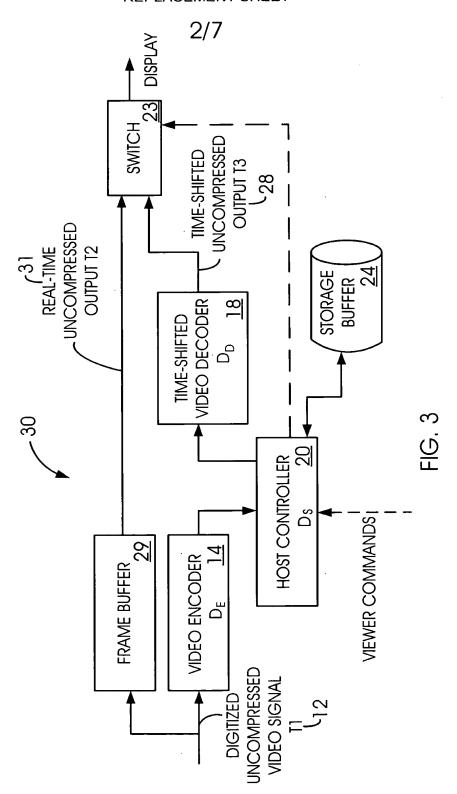

CC-084/CPA REPLACEMENT SHEET

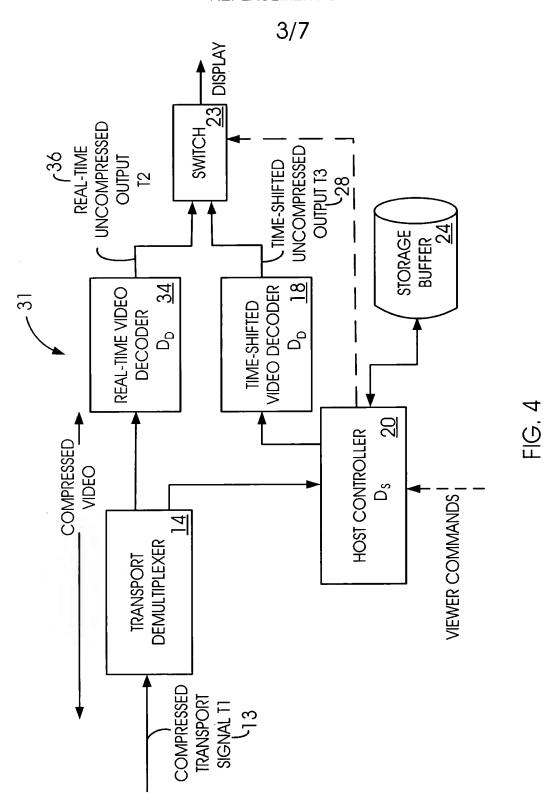

CC-084/CPA REPLACEMENT SHEET 4/7 START SYSTEM 201 REAL-TIME MODE SIGNAL DISPLAYED T2, RECORDING (a) TO STORAGE BUFFER CONTINUES, DECODER 18 IS IDLE CHANNEL CHANGE ALL OTHER TRICK PLAY $^{(b)}$ **FUNCTIONS CALLED** HOST QUEUES UP THE REQUESTED FRAME SWITCH DISPLAY TO TIME-SHIFT DECODER OUTPUT T3 SWITCH DISPLAY TO SINGLE STEP OR SLOW REAL-TIME MODE T2 MOTION FUNCTION CALLED 211 CHANNEL CHANGE SWITCH DISPLAY TO TIME-SHIFT DECODER OUTPUT T3 213

FIG. 5A

TIMESHIFT MODE SIGNAL DISPLAYED T3, RECORDING TO STORAGE BUFFER CONTINUES, DECODER 18 IS ACTIVE

215

CC-084/CPA REPLACEMENT SHEET

5/7

